


 SBR "EXTREME-20" VULCANIZED RUBBER VIBRATION-DAMPING FOOT MOUNT

 VIBRATIONS DÄMPFENDER BODENSOCKEL AUS VULKANISIERTEM SBR-GUMMI "EXTREME-20"

 SUPPORT AU SOL AMORTISSEUR EN CAOUTCHOUC VULCANISÉ SBR « EXTREME-20 »

 НАПОЛЬНОЕ ВИБРОИЗОЛЯЦИОННОЕ ОСНОВАНИЕ ИЗ ВУЛКАНИЗИРОВАННОЙ РЕЗИНЫ SBR "EXTREME-20"



EXTREME-20 1200



EXTREME-20 1000



EXTREME-20 600




EXTREME-20 450

EXTREME-20 250



- PROFILE IN ALUMINIUM. FIXING WITH THREADED PLATE TYPE-B PROFILE
- PROFIL AUS ALUMINIUM BEFESTIGUNG MIT GEWINDEPLÄTTCHEN PROFIL TYP B
- PROFILÉ EN ALUMINIUM, FIXATION AVEC PLAQUETTE FILETÉE PROFILÉ TYPE B
- ПРОФИЛЬ ИЗ АЛЮМИНИЯ КРЕПЛЕНИЕ РЕЗЬБОВОЙ ПЛАСТИНОЙ ПРОФИЛЬ ТИПА В

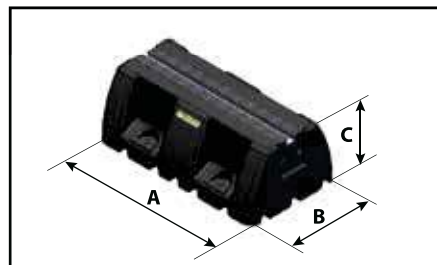

CODE   BESTELNR.   RÉF.   КОД	A mm	B mm	C mm	LOAD CAPACITY KG   TRAGFÄHIGKEIT KG   CHARGE MAXI, KG   ГРУЗОПОДЪЕМНОСТЬ КГ.	MIN.PACK   PACKUNG MIND.   EMB. MIN.   УПАК. МИН.
11105060V	250	140	95	200	4
11105062V	450	140	95	300	2
11105064V	600	140	95	500	2
11105066V	1000	140	95	650	2
11105068V	1200	140	95	750	2